


# EBSRAY PUMPS

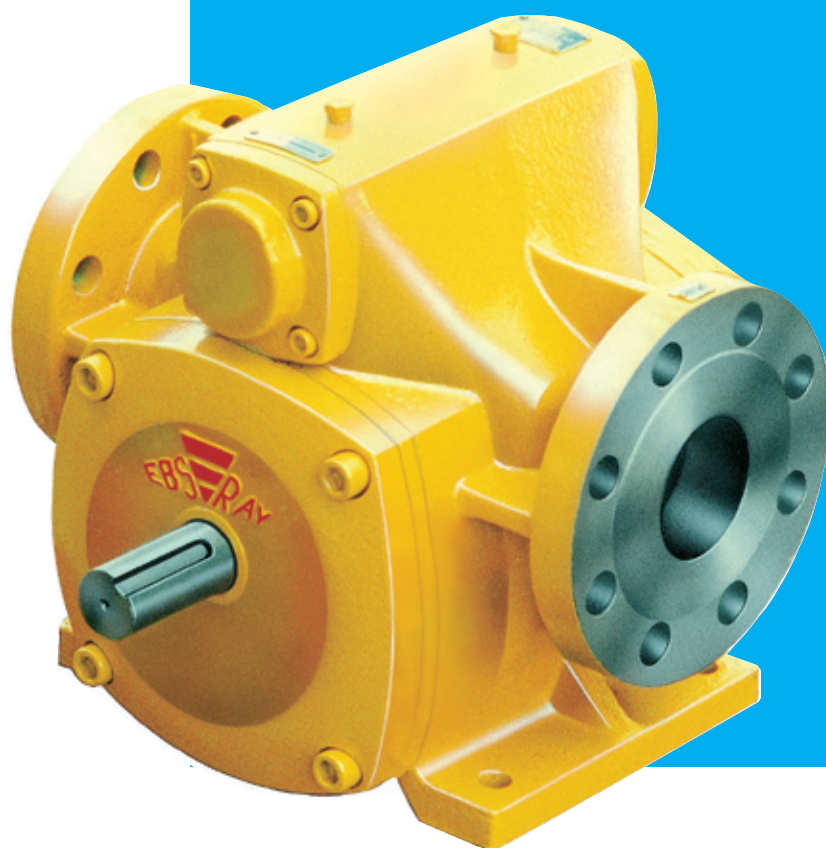

**Positive Displacement  
Rotary Sliding Vane Pump**

***....for LPG APPLICATIONS***

***V SERIES - MODELS V20 & V30***



# V SERIES - MODELS V20 & V30

## ...for LPG APPLICATIONS

### Features include:



- ✓ Positive Axial Rotor Location
- ✓ Balanced Mechanical Seals
- ✓ Heavy Duty Ball Bearings
- ✓ O Ring Sealing
- ✓ Optional Integral Bypass Valve

### Typical Duties:

- ✓ Transport Tanker Services
- ✓ Bulk Depots
- ✓ Terminals
- ✓ Load in / Load out
- ✓ Cylinder Filling

### Assured Quality and Performance


EBSRAY's certified ISO 9001 Quality System assures compliance with the high safety and quality standards demanded by the LPG industry

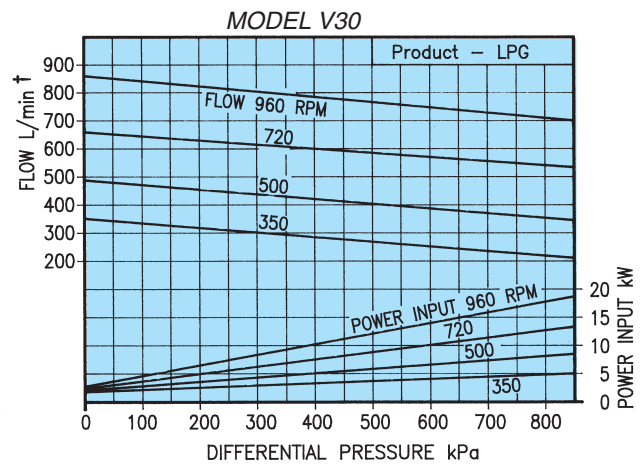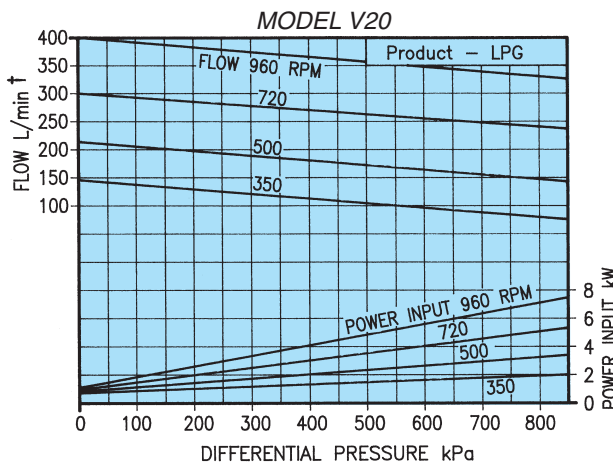

MATERIALS OF CONSTRUCTION	
Casing	Ductile Iron to ASTM A395 / Cast Steel
Vanes	Synthetic
Shaft	Stainless Steel
Mechanical Seals	Balanced Carbon/Niresist
Liner, Rotor, Wearplates	Cast Iron
Elastomers	Nitrile

SPECIFICATIONS	V20	V30
Max Flow L/min†	400	900
Max Speed RPM	960	960
Max Diff Pressure kPa	1050	1050
Hydro Test Press' kPa	7000	7000
Max Temperature °C	100	100

† Approximate Flow Rates attainable when adequate NPSH is available in the LPG system. Other factors such as Propane/Butane ratio may also affect performances. For higher flow rates, refer to EBSRAY Model V40 pump data.

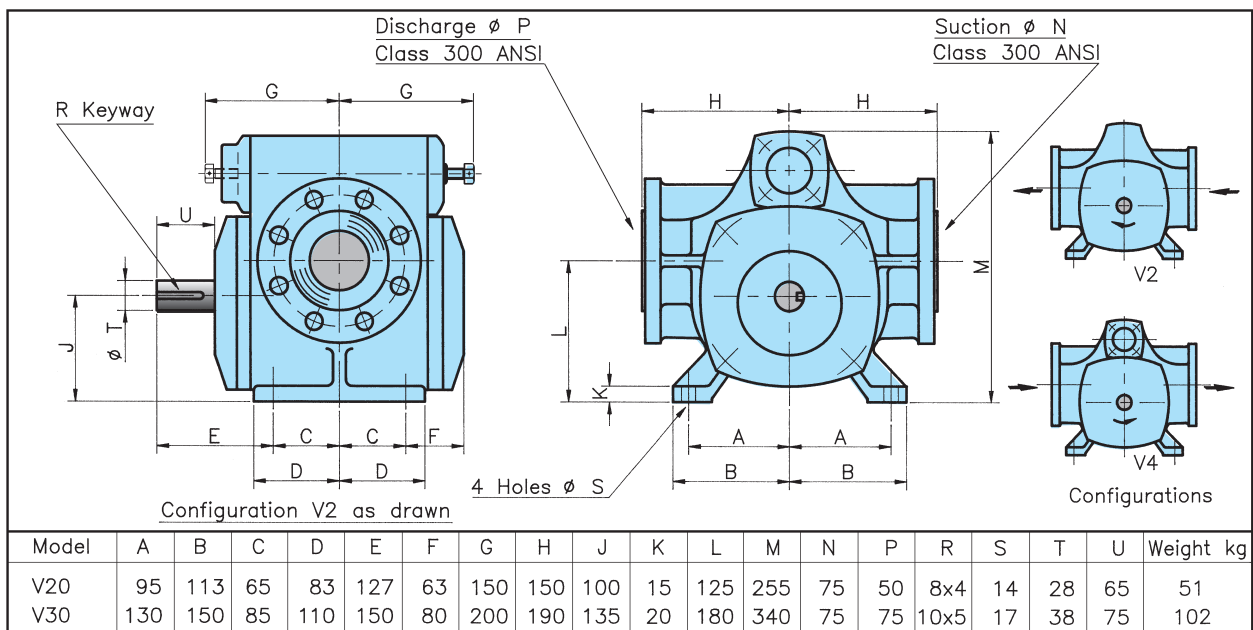

ISO 9001  
Lic 3332  
Standards  
Australia

Quality  
Endorsed  
Company

### EBS-RAY PUMPS PTY. LIMITED

ACN 000 061 003

Head Office and Works  
628 Pittwater Road  
Brookvale NSW 2100  
Australia.

Telephone: (61 2) 9905 0234  
Fax: (61 2) 9938 3825  
www.ebsraypumps.com.au

Branch Office Victoria  
Phone: (03) 9706 7263  
Fax: (03) 9706 7312

Branch Office Queensland  
Phone: (07) 3260 7411  
Fax: (07) 3260 7422

NOTE: All specifications and illustrations are typical only and subject to revision without notice. Certified data available upon request.



Publication #1184-01