



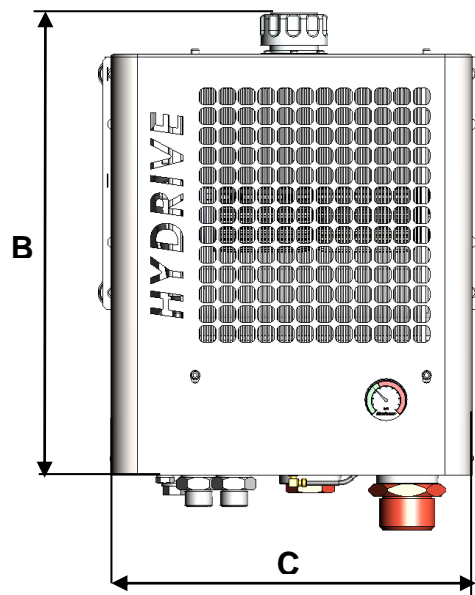

CHARACTERISTICS

		STANDARD	AVAILABLE OPTIONS
Oil flow (l/min)		55 à 150	55 à 200
Maximum pressure bar (PSI)		350 (5076)	
Power dissipation (KW)		20 for 40°C temperature rise	
Oil tank capacity (litre)		17	
Fan speed (rpm)		2800	
Fan hydraulic motor flow (l/min)		8.2	
Hydraulic motor management quantity		1	
Dimensions mm (in.)	A	559 (22)	
	B	566 (22.3)	
	C	428 (16.85)	
Weight dry kg (lbs)		35 (77)	

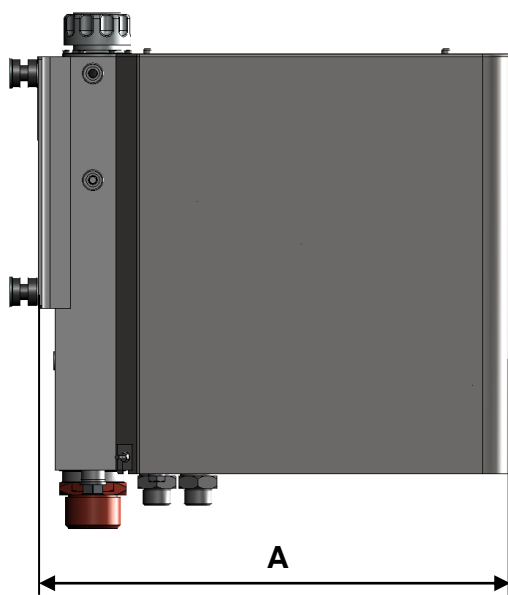

OPERATING LIMITS

	STANDARD MATERIALS
Minimum temperature °C (°F)	-40 (40)
Maximum temperature °C (°F)	50 (122)

MATERIALS OF CONSTRUCTION

Part No	PART NAME	STANDARD MATERIAL	AVAILABLE OPTIONS
2	Casing	Stainless steel	
16	Hydraulic bloc	Anodized aluminium	
30	Fan	Steel coated	
35	Hydraulic motor	Aluminium	
43	Radiator	Aluminium painted	
45 - 46	Hoses	Rubber	
114	Vibration pads	Rubber	

